

## Double-Acting Positive Displacement Metering System



**IPS-Single Metering Unit for Continuous Flow of High Viscosity Materials**

- ▶ Integrated Pneumatic System (IPS) is designed to apply high viscosity single component sealants and adhesives in high volume applications
- ▶ Maintains continuous material outlet pressure for repeatable and consistent bead patterns
- ▶ Ideal for Multi-Stream Orifice and Spray applications requiring uniform pressure
- ▶ Double-acting Positive-Rod Displacement dispensing system
- ▶ Designed to be integrated into a robot work cell
- ▶ Includes heavy duty frame with small footprint
- ▶ Junction box for robotic interface
- ▶ Optional DeviceNet interface
- ▶ Dual Pneumatic Cylinders

### Typical Applications

- Liquid-Applied Sound Deadener (LASD)
- Multi-Stream Orifice (MSA) patterns
- High speed PVC Sealer extrude and spray
- High volume Mastic drops and beads
- Large volume Anti-Flutter expandables
- Robotic and automated dispensing

# IPD – Single Meter Dispensing System



## Typical System Components:



300 Gallon Supply Pump




IPS Single Metering System




Application Dispense Valve

## Typical Applications:

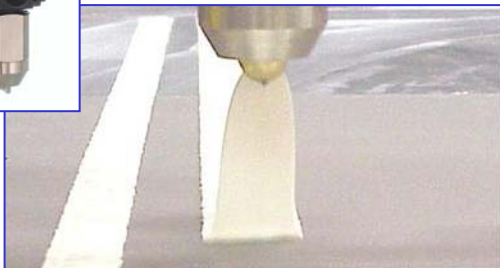

Typical Ribbon Bead Pattern  
Dispensing PVC Sealer

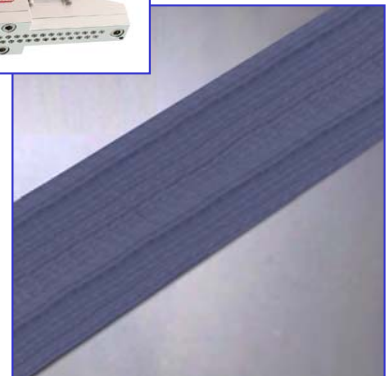

Typical Multi-Stream Pattern  
Dispensing LASD



Manufacturers of Precision Dispense Systems & Valves

45677 Helm Street • P.O. Box 701460  
Plymouth, MI 48170 • USA  
Phone: (734) 459-8600 Fax: (734) 459-8686  
Web: [www.SealantEquipment.com](http://www.SealantEquipment.com)  
E-mail: [sales@SealantEquipment.com](mailto:sales@SealantEquipment.com)