




Manufacturers of Precision Dispense Systems & Valves

Variable Ratio - Continuous Flow

Servo-Flo[®] 704-PGM

Variable Ratio, 2-Part Portable Gear Meter-Mix Dispense System

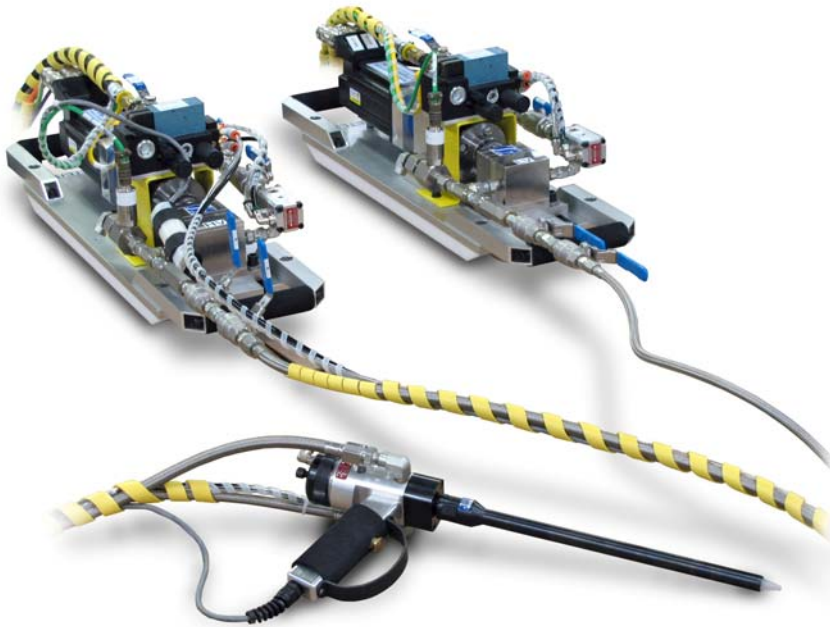

Servo-Flo 704-PGM Portable Gear Meter System
Mounted on Individual No-Mar Skid Plates

- ▶ **The Servo-Flo 704-PGM meter system dispenses 2-component mixed materials**
- ▶ **Each meter is skid mounted with handles for easy portability**
- ▶ **Dual independent-drive servo gear meters to select any ratio without changing hardware**
- ▶ **Delivers consistent bead profiles or precision shot volumes**
- ▶ **Electronically select flow rate, shot volume and filling profile**
- ▶ **Accepts external input signal for automated or manual dispensing**


FEATURES

- For bead and shot applications, the system accepts an gun trigger or external 0-10v analog signal to produce a precise bead profile or shot volume. The flow rate is variable during the dispense cycle.
- For shot applications, create and select one of multiple preset shot sizes. And, create shot profiles which consist of several segments, each having its own volume and flow rate settings.
- Job shot volumes and flow rates are selected and adjusted through the operator interface.
- The Auto Purge cycle has adjustable warning signals, fault timers and purge volumes.
- Optional footswitch or electric hand trigger is available for manual dispensing or manual backup.
- Contact closures, wired to terminals, are provided for status interlocks to customer. Discrete interlocks from customer require contact closures for our 24V DC signals.

45677 Helm Street • P.O. Box 701460 • Plymouth, MI 48170 • USA
Phone: (734) 459-8600 • Fax: (734) 459-8686
eMail: Sales@SealantEquipment.com • www.SealantEquipment.com



Servo-Flo[®] 704-HV Gear Meter System

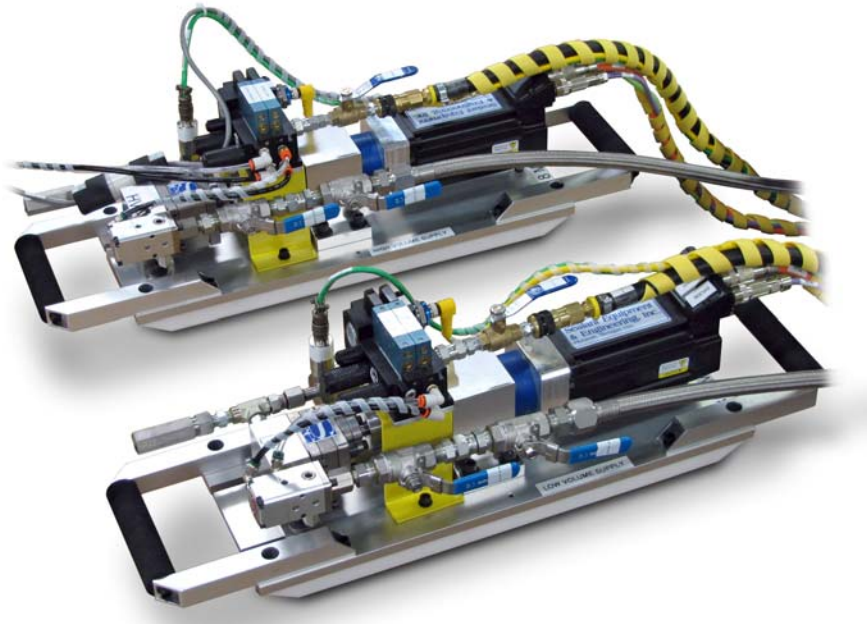

Servo-Flo 704-PGM Portable Gear Meter



Color touch-screen allows operator to set the exact flow rate and volume of mixed material



Manual Dispense Valve dispensing 2-Part Material for Composite Bonding Application



Automatic Valve for Molding Application with Shot Volume Accuracy

Form SF704PGM-001-A



45677 Helm Street • P.O. Box 701460
Plymouth, MI 48170 • USA
Phone: (734) 459-8600 • Fax: (734) 459-8686
Visit us at www.sealantequipment.com
Email us at sales@sealantequipment.com